

### Description

The BP3126 is a high precision primary-side feedback and regulation controller for LED lighting, it operates in constant current control mode and is designed to work in inductor current discontinuous conduction mode and extremely suitable for flyback convertor under universal input, the output power of system should be less than 24W.

The BP3126 integrates 650V power MOSFET. Since adopting primary sense and feedback control technology, the secondary sense and feedback circuit is eliminated. The loop compensation components are also removed while maintaining stability overall operating conditions. The low component counts and low BOM cost are realized.

Since using the proprietary high accurate current sense method, the BP3126 realizes  $\pm 3\%$  accuracy of LED current along with excellent line regulation and load regulation.

The BP3126 offers rich protection functions including LED short circuit protection, LED open circuit protection, die over-temperature protection, VCC over voltage protection, VCC under voltage protection and FB short circuit protection. All the protection features are auto-recovery.

### Typical Application

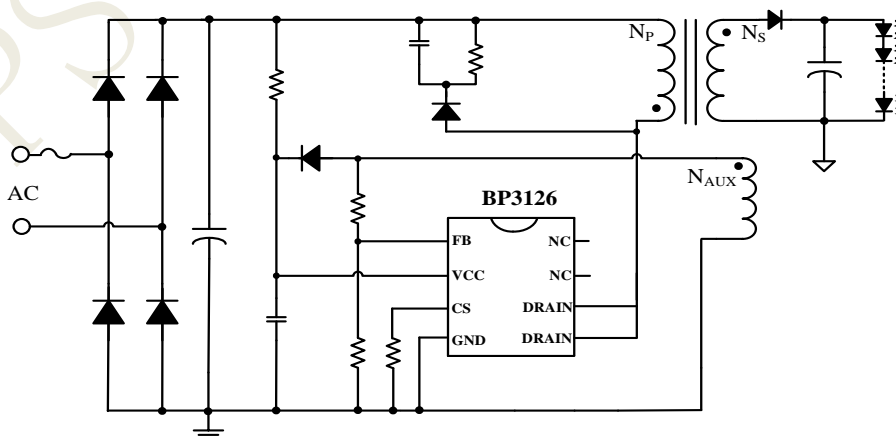


Figure 1. Typical application circuit for BP3126

### Features

- ◆ Built-in 650V Power MOSFET
- ◆ Constant current control without secondary sense and feedback circuit.
- ◆  $\pm 3\%$  LED current accuracy
- ◆ Ultra low operating current to improve efficiency
- ◆ High resistance feedback resistor to improve efficiency
- ◆ Universal input voltage
- ◆ LED short and open circuit protection
- ◆ VCC under-voltage protection
- ◆ Feedback loop short circuit protection
- ◆ Current sense resistor open circuit protection
- ◆ Over temperature protection
- ◆ No external loop compensation component required
- ◆ Available in DIP-8 package

### Applications

- ◆ GU10/E27 LED bulb, spot light
- ◆ Other LED lighting

### Ordering Information

Part Number	Package	Operating Temperature	Package Method	Marking
BP3126	DIP8	-40°C to 105°C	Tube 50 Piece/Tube	BP3126 XXXXXX WWXY

### Pin Configuration and Marking Information

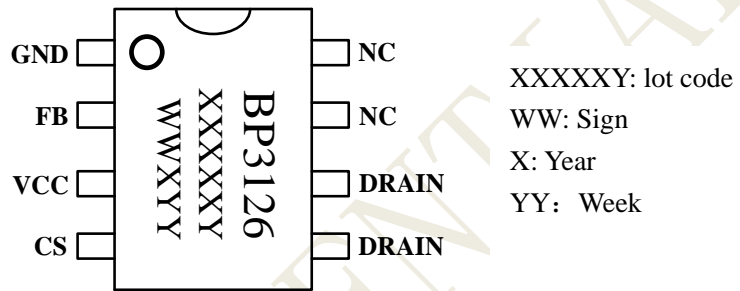


Figure 2. Pin configuration

### Pin Definition

Pin No.	Name	Description
1	GND	Ground
2	FB	Feedback. This pin detects the output information from auxiliary winding.
3	VCC	Power supply
4	CS	Current sense. This pin connects a current sense resistor to GND to detect the primary current of transformer.
5,6	DRAIN	Internal high voltage MOSFET drain.
7,8	NC	No connection, must be floated