




◀ PAGE BACK ✕ CLOSE

Product Name **Multilayer Inductor for Ultra High**
Series **Frequency Range**
Type **MLG Series**
Part Number **1608 Type**
 MLG1608B8N2DT000

Product Lifecycle Stage PROD

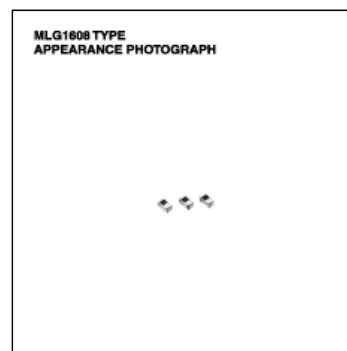

Specification

Mounting Method Flag	Yes	
Processing	MULTI-LAYER	
Shape	SMD	
Size Code	1608	
Body Length(L)	Nom	1.6 m m
Body Breadth(W)	Nom	0.8 m m
Body Height(T)	Nom	0.8 m m
Rated Inductance	Nom	8.2 n H
Inductance Tolerance (Value)	Min	-0.5 n H
	Max	0.5 n H
Test Frequency of Inductance	Nom	100 M Hz
Q	Min	10
Test Frequency of Q	Nom	100 M Hz
	Min	4.5 G Hz
Self Resonant Frequency	Typ	5.6 G Hz
	Max	0.2 Ohm
DC Resistance	Nom	0.1 Ohm
Rated Current	Max	600 m A
IDC1 (Inductance Change)	Max	600 m A
IDC2 (Temperature Rise)	Max	600 m A
Temperature Rise	Max	20 Cel
Terminal Material	Ag(100%)/Sn plating	
Polarity Marking	Yes	
Magnetic Shielding	No	
Soldering Method	Reflow,Iron Soldering	
Measuring Equipment(L, Q, Rdc)	HP4291A	
Category Temperature Range	Min	-55 Cel
	Max	125 Cel
Storage Temperature Range	Min	-55 Cel
	Max	125 Cel
Weight	Nom	0.004 g

Summary/Applications/Feature

Summary	Small size High-Q RF coil for high frequency circuit of mobile application.
Applications	Cellular,VCO module,PA module,Bluetooth,Other high frequency circuit for mobile applications
Feature	Small size High-Q RF coil for high frequency circuit of mobile application. Lead free, lead free soldering, and RoHS compliant

Packaging

Packing	Punched (Paper)Taping [180mm Reel]	
Minimum Package Qty	Nom	4000 Pcs
Minimum Order Qty	Nom	4000 Pcs

Details

● [**Caution**]

Specifications which provide more details for the proper and safe use of the described product are available upon request.

● [**Notice of Revision and Improve**]

All specifications are subject to change without notice.

[PAGE TOP](#) 

Copyright(c) 1996-2008 All rights reserved.