

# SMD Inductors(Coils) For High Frequency(Multilayer)

Conformity to RoHS Directive

## MLK Series MLK1005


### FEATURES

- Supports operating frequency bands of up to 12GHz with nominal inductance values from 1 to 100nH.
- Provides high Q characteristics.
- Advanced monolithic structure is formed using a multilayering and sintering process with ceramic and conductive materials for high-frequency.
- Because the part is non-polarized, it can be used in bulk cassette loaders.
- It is a product conforming to RoHS directive.

### APPLICATIONS


High-frequency circuits for portable telephones, personal handy-phone systems(PHS) or other mobile communication appliances.

### SHAPES AND DIMENSIONS



Weight: 1.0mg


### RECOMMENDED PC BOARD PATTERN



Dimensions in mm

### RECOMMENDED SOLDERING CONDITION

#### REFLOW SOLDERING

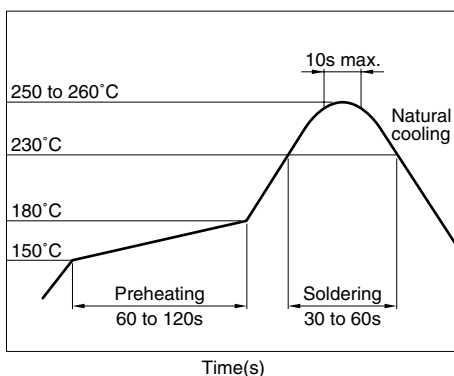

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- Please contact our Sales office when your application are considered the following:  
The device's failure or malfunction may directly endanger human life (e.g. application for automobile/aircraft/medical/nuclear power devices, etc.)

- All specifications are subject to change without notice.

### PRODUCT IDENTIFICATION

MLK	1005	S	2N2	S	T
(1)	(2)	(3)	(4)	(5)	(6)

(1) Series name

(2) Dimensions

1005	1.0×0.5mm (L×W)
------	-----------------

(3) Material code

(4) Inductance value

2N2	2.2nH
12N	12nH
R10	100nH

(5) Inductance tolerance

S	±0.3nH
D	±0.5nH
J	±5%

(6) Packaging style

T	Taping (reel)
---	---------------

### SPECIFICATIONS

Operating temperature range	-55 to +125°C
Storage temperature range	-55 to +125°C [Unit of product]

### PACKAGING STYLE AND QUANTITIES

Packaging style	Quantity
Taping	10000 pieces/reel

### HANDLING AND PRECAUTIONS

- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and product temperature does not exceed 150°C.
- After mounting components onto the printed circuit board, do not apply stress through board bending or mishandling.
- When hand soldering, apply the soldering iron to the printed circuit board only. Temperature of the iron tip should not exceed 350°C. Soldering time should not exceed 3 seconds.

## ELECTRICAL CHARACTERISTICS

Inductance (nH)	Inductance tolerance	Test frequency L, Q (MHz)	Q min.	Q typ.	Self-resonant frequency(GHz)		DC resistance ( $\Omega$ )		Rated current (mA) max.	Part No.
					min.	typ.	max.	typ.		
1	$\pm 0.3$ nH	100	5	7	12	19	0.1	0.05	500	MLK1005S1N0ST
1.2	$\pm 0.3$ nH	100	5	7	11	16.2	0.15	0.07	500	MLK1005S1N2ST
1.5	$\pm 0.3$ nH	100	6	8	9.5	13.6	0.16	0.08	500	MLK1005S1N5ST
1.8	$\pm 0.3$ nH	100	6	8	8.5	10.5	0.2	0.11	500	MLK1005S1N8ST
2.2	$\pm 0.3$ nH	100	6	8	8	10	0.21	0.11	500	MLK1005S2N2ST
2.7	$\pm 0.3$ nH	100	6	8	7.5	9.2	0.23	0.16	500	MLK1005S2N7ST
3.3	$\pm 0.3$ nH	100	7	9	7	8.5	0.25	0.16	400	MLK1005S3N3ST
3.9	$\pm 0.3$ nH	100	7	9	6.5	8.2	0.28	0.16	400	MLK1005S3N9ST
4.7	$\pm 0.3$ nH	100	7	9	6	7.3	0.32	0.19	400	MLK1005S4N7ST
5.6	$\pm 0.5$ nH	100	7	9	5.7	7.2	0.35	0.21	400	MLK1005S5N6DT
6.8	$\pm 0.5$ nH	100	7	9	5.5	6.8	0.38	0.28	400	MLK1005S6N8DT
8.2	$\pm 0.5$ nH	100	7	9	5	6.5	0.42	0.31	350	MLK1005S8N2DT
10	$\pm 5\%$	100	7	9	4.7	6.3	0.45	0.33	350	MLK1005S10NJT
12	$\pm 5\%$	100	7	9	4.3	6.2	0.5	0.41	350	MLK1005S12NJT
15	$\pm 5\%$	100	7	9	4	5.6	0.55	0.44	300	MLK1005S15NJT
18	$\pm 5\%$	100	7	9	3.7	5.3	0.65	0.53	250	MLK1005S18NJT
22	$\pm 5\%$	100	7	9	3.5	5.1	0.75	0.58	200	MLK1005S22NJT
27	$\pm 5\%$	100	7	9	3	4.7	0.95	0.75	200	MLK1005S27NJT
33	$\pm 5\%$	100	7	9	2.5	4.2	1.1	0.81	200	MLK1005S33NJT
39	$\pm 5\%$	100	6	9	2	3.4	1.2	0.67	200	MLK1005S39NJT
47	$\pm 5\%$	100	6	9	1.8	2.9	1.3	0.79	200	MLK1005S47NJT
56	$\pm 5\%$	100	6	9	1.5	2.8	1.4	0.97	200	MLK1005S56NJT
68	$\pm 5\%$	100	6	9	1.2	2.7	1.6	1.18	150	MLK1005S68NJT
82	$\pm 5\%$	100	6	9	1	2.1	1.8	1.24	150	MLK1005S82NJT
100	$\pm 5\%$	100	6	9	0.8	2	2.2	1.5	100	MLK1005SR10JT

- Test equipment

Inductance Q: HP4291A+16193A SRF: HP8720C Rdc:YOKOGAWA TYPE7561


- Rated current: Value obtained when current flows and temperature has risen to 20°C.

## L, Q vs. FREQUENCY CHARACTERISTICS


Part No.	Inductance(nH)typ.					Q typ.				
	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz	800MHz	900MHz	1.8GHz	2.0GHz	2.4GHz
MLK1005S1N0ST	0.9	0.9	0.9	0.9	0.9	19	20	27	29	33
MLK1005S1N2ST	1.1	1.1	1.1	1.1	1.1	21	23	31	33	37
MLK1005S1N5ST	1.4	1.4	1.4	1.4	1.4	22	23	32	34	38
MLK1005S1N8ST	1.7	1.7	1.7	1.7	1.7	22	24	33	35	39
MLK1005S2N2ST	2.1	2.1	2.1	2.1	2.1	21	23	32	34	37
MLK1005S2N7ST	2.5	2.5	2.6	2.6	2.6	22	24	33	35	38
MLK1005S3N3ST	3.1	3.1	3.2	3.2	3.2	23	24	34	36	39
MLK1005S3N9ST	3.6	3.6	3.7	3.8	3.8	23	24	34	35	38
MLK1005S4N7ST	4.4	4.4	4.6	4.6	4.7	23	25	34	36	39
MLK1005S5N6DT	5.3	5.3	5.4	5.5	5.7	22	24	33	34	36
MLK1005S6N8DT	6.4	6.4	6.7	6.8	7.0	24	25	35	36	39
MLK1005S8N2DT	7.8	7.8	8.2	8.3	8.6	25	26	36	37	39
MLK1005S10NJT	9.5	9.5	10.0	10.2	10.7	24	25	35	35	37
MLK1005S12NJT	11.4	11.4	12.2	12.5	13.1	25	26	36	37	39
MLK1005S15NJT	14.3	14.3	15.4	15.9	16.8	25	26	35	36	37
MLK1005S18NJT	17.2	17.2	18.7	19.2	20.5	24	26	34	34	35
MLK1005S22NJT	21.0	21.1	23.3	24.1	26.1	24	25	32	33	33
MLK1005S27NJT	26.0	26.2	29.5	30.9	34.2	24	25	32	32	32
MLK1005S33NJT	31.9	32.1	36.9	38.9	43.9	24	25	31	31	30
MLK1005S39NJT	38.1	38.6	47.4	51.8	62.8	23	24	27	26	23
MLK1005S47NJT	46.2	46.9	59.6	66.5	84.7	22	23	25	23	19
MLK1005S56NJT	55.5	56.3	74.5	84.8		22	23	23	21	17
MLK1005S68NJT	68.1	69.4	98.1	117.0		22	22	21	19	13
MLK1005S82NJT	85.1	87.7	159.4			20	20	15	11	
MLK1005SR10JT	104.7	108.2	209.3			20	21	14	10	

• All specifications are subject to change without notice.


### TYPICAL ELECTRICAL CHARACTERISTICS INDUCTANCE vs. FREQUENCY CHARACTERISTICS

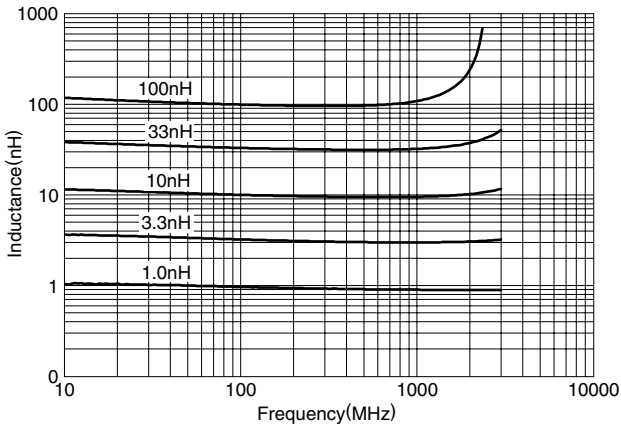


### Q vs. FREQUENCY CHARACTERISTICS

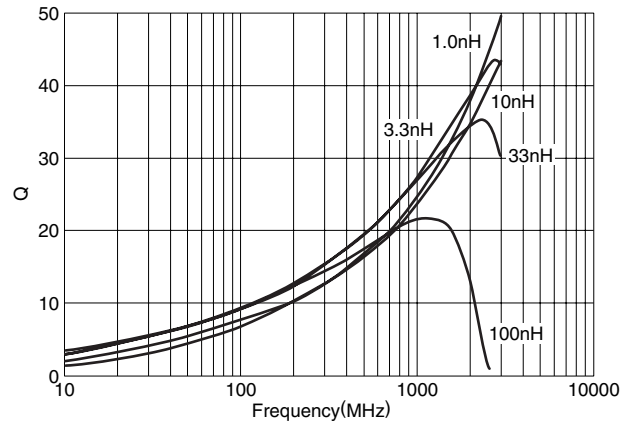

### PACKAGING STYLES REEL DIMENSIONS

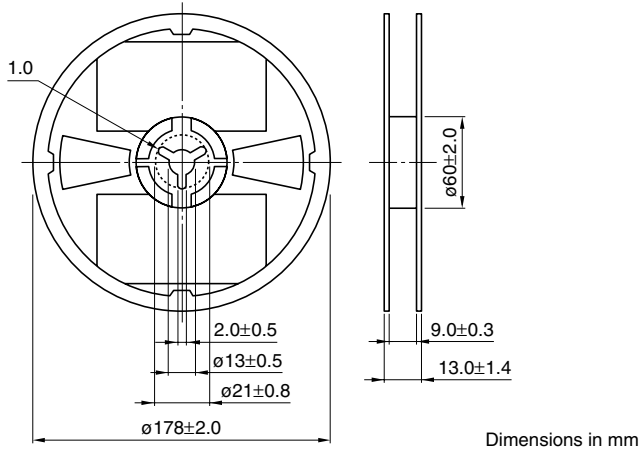

### TAPE DIMENSIONS

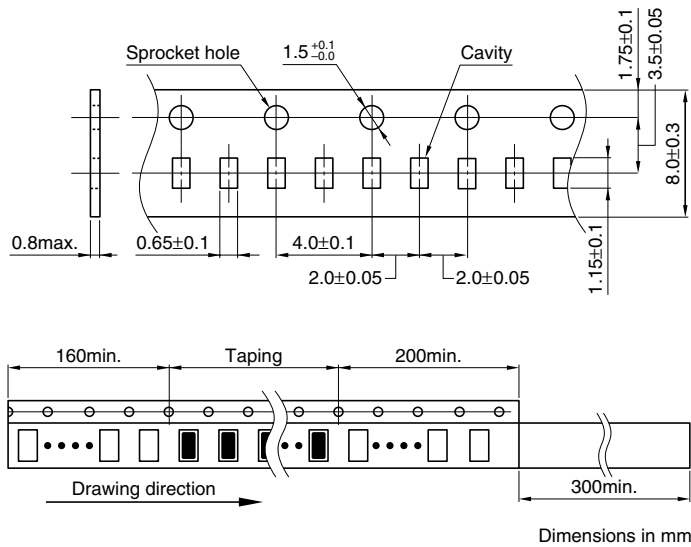

• All specifications are subject to change without notice.