


Chip Type Standard Capacitors (height:5.5mm) Series RV2

- Compatible with surface mounting for 5.5mm high capacitors.
- Supplied with carrier taping.
- Guarantees 2000 hours at 85°C.




Marking color : Black print

Specifications

Item	Performance																																		
Category temperature range (°C)	-40 to +85																																		
Tolerance at rated capacitance (%)	±20 (20°C,120Hz)																																		
Leakage current (µA)	Less than 0.01CV or 3 whichever is larger(after 2 minutes) C: Rated capacitance(µF); V: Rated voltage(V) (20°C)																																		
Tangent of loss angle (tanδ)	Rated voltage (V)																																		
	<table border="1"> <tr> <td></td> <td>4</td> <td>6.3</td> <td>10</td> <td>16</td> <td>25</td> <td>35</td> <td>50</td> </tr> <tr> <td>tanδ (max.)</td> <td>0.42</td> <td>0.30</td> <td>0.24</td> <td>0.22</td> <td>0.16</td> <td>0.14</td> <td>0.12</td> </tr> <tr> <td></td> <td>φ 3</td> <td>φ 4 to φ 6.3</td> <td>0.42</td> <td>0.28</td> <td>0.24</td> <td>0.20</td> <td>0.14</td> </tr> </table>			4	6.3	10	16	25	35	50	tanδ (max.)	0.42	0.30	0.24	0.22	0.16	0.14	0.12		φ 3	φ 4 to φ 6.3	0.42	0.28	0.24	0.20	0.14									
	4	6.3	10	16	25	35	50																												
tanδ (max.)	0.42	0.30	0.24	0.22	0.16	0.14	0.12																												
	φ 3	φ 4 to φ 6.3	0.42	0.28	0.24	0.20	0.14																												
Characteristics at high and low temperature	Rated voltage (V)																																		
	<table border="1"> <tr> <td rowspan="4">Impedance ratio (max.)</td> <td rowspan="2">φ 3</td> <td>Z-25°C / Z+20°C</td> <td>7</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>17</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> </tr> <tr> <td rowspan="2">φ 4 to φ 6.3</td> <td>Z-25°C / Z+20°C</td> <td>7</td> <td>3</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C / Z+20°C</td> <td>15</td> <td>8</td> <td>5</td> <td>4</td> <td>3</td> <td>3</td> <td>3</td> </tr> </table>		Impedance ratio (max.)	φ 3	Z-25°C / Z+20°C	7	4	3	2	2	2	2	Z-40°C / Z+20°C	17	10	8	6	4	3	3	φ 4 to φ 6.3	Z-25°C / Z+20°C	7	3	3	2	2	2	Z-40°C / Z+20°C	15	8	5	4	3	3
Impedance ratio (max.)	φ 3	Z-25°C / Z+20°C			7	4	3	2	2	2	2																								
		Z-40°C / Z+20°C		17	10	8	6	4	3	3																									
	φ 4 to φ 6.3	Z-25°C / Z+20°C		7	3	3	2	2	2																										
		Z-40°C / Z+20°C	15	8	5	4	3	3	3																										
Endurance (85°C) (Applied ripple current)	Test time		2000 hours (φ 3:1000 hours)																																
	Leakage current		The initial specified value or less																																
	Percentage of capacitance change		Within ±20% of initial value (4WV: ±30%)																																
	Tangent of the loss angle		200% or less of the initial specified value (4WV: 300%)																																
Shelf life (85°C)	Test time : 1000 hours; other items are the same as those for the endurance. Voltage application treatment : According to JIS C5101-1																																		
Applicable standards	JIS C5101-1, -18 1998 (IEC 60384-1 1992, -18 1993)																																		

Outline Drawing

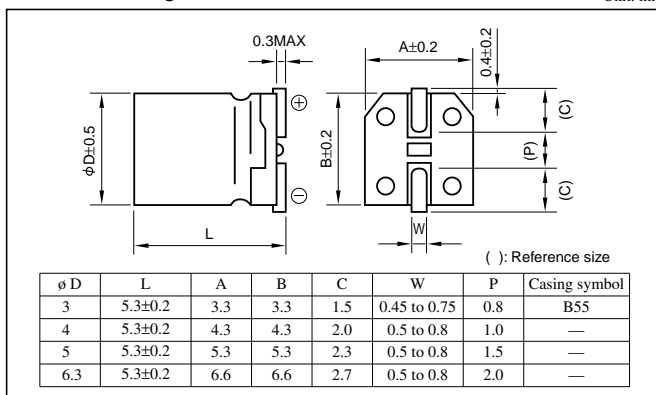

- Soldering conditions and land size are described on page 14.
- The taping specifications are described on page 15.

Coefficient of Frequency for Rated Ripple Current

Rated voltage(V)	Frequency(Hz)			
	50 · 60	120	1k	10k · 100k
4 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50	0.80	1	1.35	1.50

Part numbering system

Environmental item	• φ3 (example: 16V10µF) RV2 — 16 V 100 M B55 U —							
	Series code	Rated voltage symbol	Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Additional symbol	Taping symbol	
Former item	• φ4 to φ6.3 (example: 16V47µF) RV2 — 16 V 470 M B55 U —							
	Series code	Rated voltage symbol	Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Additional symbol	Taping symbol	
	• φ3 (example: 16V10µF) RV2 — 16 V 100 M B55 U —							
	Series code	Rated voltage symbol	Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Additional symbol	Taping symbol	
	• φ4 to φ6.3 (example: 16V47µF) RV2 — 16 V 470 M B55 U —							
	Series code	Rated voltage symbol	Rated capacitance symbol	Capacitance tolerance symbol	Casing symbol	Additional symbol	Taping symbol	

- For 16V 100µF, "S" is suffixed to the tolerance, as MS□-□

Standard Ratings

Rated capacitance (µF)	4				6.3				10				16				25				35				50			
	Case	Casing symbol	ESR Ω	Rated ripple current mArms	Case	Casing symbol	ESR Ω	Rated ripple current mArms	Case	Casing symbol	ESR Ω	Rated ripple current mArms	Case	Casing symbol	ESR Ω	Rated ripple current mArms	Case	Casing symbol	ESR Ω	Rated ripple current mArms	Case	Casing symbol	ESR Ω	Rated ripple current mArms				
0.1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	1990	1				
0.22	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	905	2				
0.33	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	754	5				
0.47	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	603	3				
1	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	503	6				
2.2	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	424	4				
3.3	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	353	7				
4.7	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	3	B55	199	6				
10	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	4	—	166	10				
22	3	B55	32	14	4	—	21	31	5	—	18	39	5	—	15	44	6.3	—	11	55	6.3	—	9.1	59	—	—	—	
33	4	—	21	31	5	—	14	44	5	—	12	48	6.3	—	10	63	6.3	—	7.0	67	—	—	—	—	—	—	—	
47	4	—	15	37	5	—	10	52	6.3	—	8.5	67	6.3	—	7.1	75	—	—	—	—	—	—	—	—	—	—	—	
100	5	—	7.0	63	6.3	—	5.0	89	6.3	—	4.0	98	6.3	—	3.3	103	—	—	—	—	—	—	—	—	—	—	—	
220	6.3	—	3.2	110	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

(Note) Rated ripple current : 85°C, 120Hz ; ESR : 20°C, 120Hz

NOTE

Design, Specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Elna:

[RV2-16V100M-R](#) [RV2-50V2R2M-R](#) [RV2-10V220M-R](#) [RV2-10V470M-R](#) [RV2-10V100M-R](#) [RV2-10V330M-R](#) [RV2-50V10M-R](#) [RV2-35V220M-R](#) [RV2-50VR47M-R](#) [RV2-35V100M-R](#) [RV2-50VR22M-R](#) [RV2-50VR33M-R](#) [RV2-25V4R7M-R](#) [RV2-4V101M-R](#) [RV2-4V470M-R](#) [RV2-25V330M-R](#) [RV2-25V220M-R](#) [RV2-10V101M-R](#) [RV2-50VR10M-R](#) [RV2-4V330M-R](#) [RV2-50V3R3M-R](#) [RV2-16V220M-R](#) [RV2-16V470M-R](#) [RV2-16V330M-R](#) [RV2-50V4R7M-R](#) [RV2-4V221M-R](#) [RV2-25V100M-R](#) [RV2-6V470M-R](#) [RV2-6V330M-R](#) [RV2-6V220M-R](#) [RV2-50V100M-R](#) [RV2-6V101M-R](#) [RV2-16V101M-R](#) [RV2-35V4R7M-R](#)